Customer name:

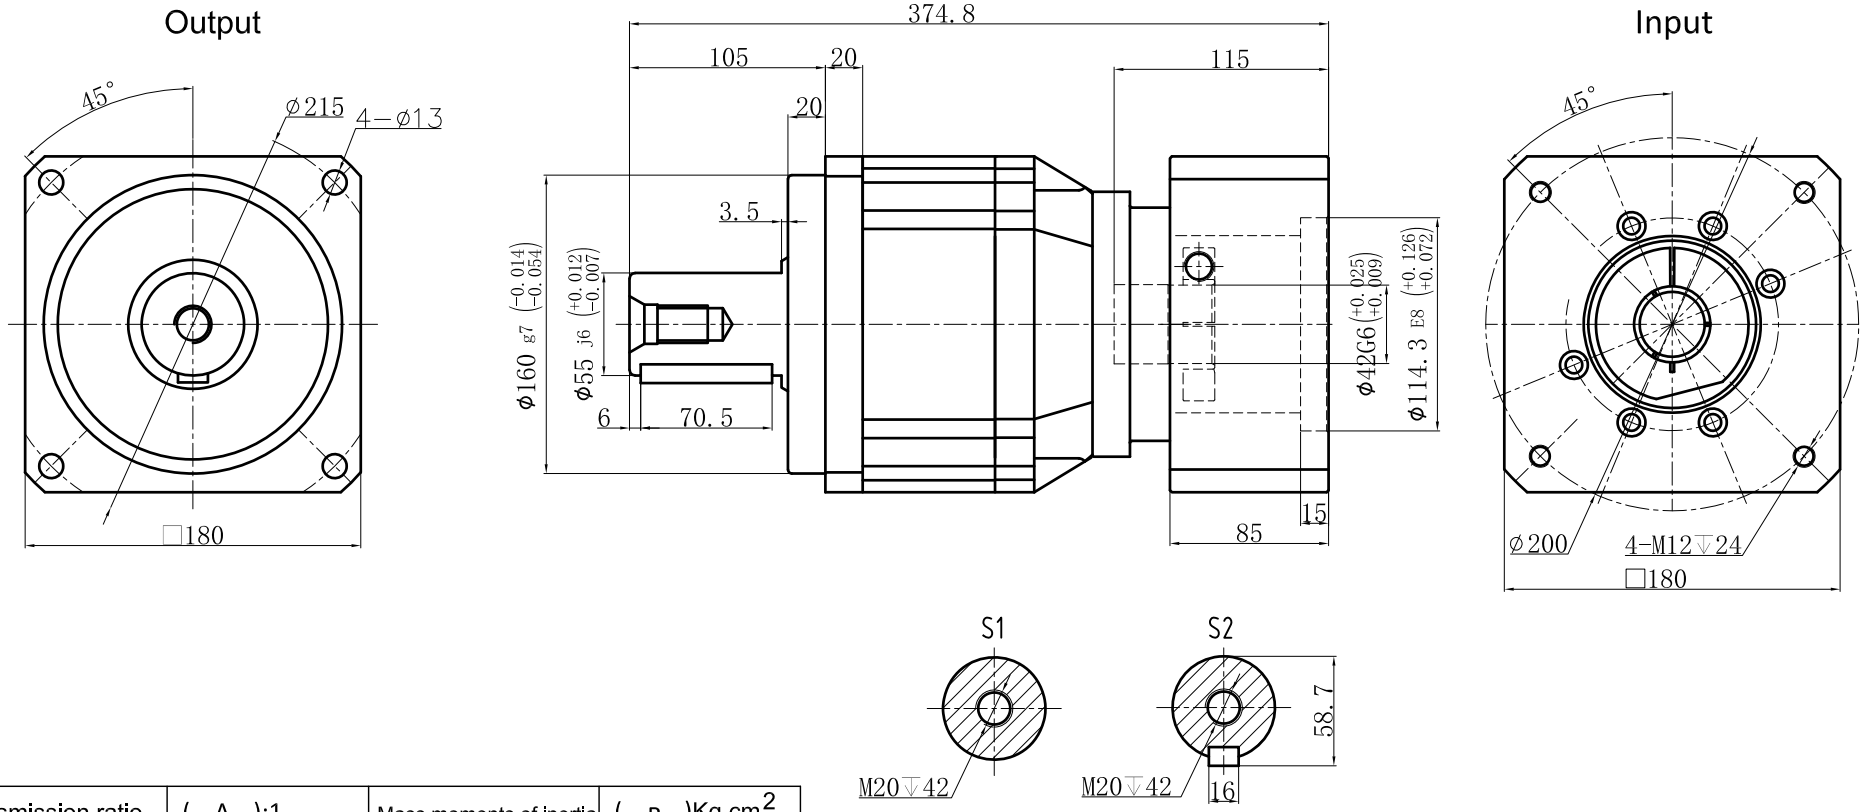

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm^2
Rated output torque	(C)Nm	Max.output torque	(D)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.radial force	14500N	Max.axial force	7250N
Efficiency	≥ 94%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	34Kg	Service life	20000h
Standard backlash	≤ 7 arcmin	Protection class	IP65
Motor power		Noise level	66dB
Motor dimensions			

	40	7.42	1000	1800	Sign/Date					
	35	7.42	1100	1980			100	7.03	910	1638
	30	7.42	1108	1994.4			80	7.03	1000	1800
	25	7.42	1200	2160			70	7.03	1100	1980
	20	7.42	1050	1890			60	7.03	1108	1994.4
	15	7.42	590	1062			50	7.03	1200	2160
Ratio	A	B	C	D		Ratio	A	B	C	D

Note				Precision planetary reducer	TB180
	Mark	No.	Sign	Date	TB180-L2
		DRAW			
		CHEC			Shaft Type / Precision
		APPR			
		RULE			

Above specifications are for standard reducer and may be subject to change without notice.