


Customer name:

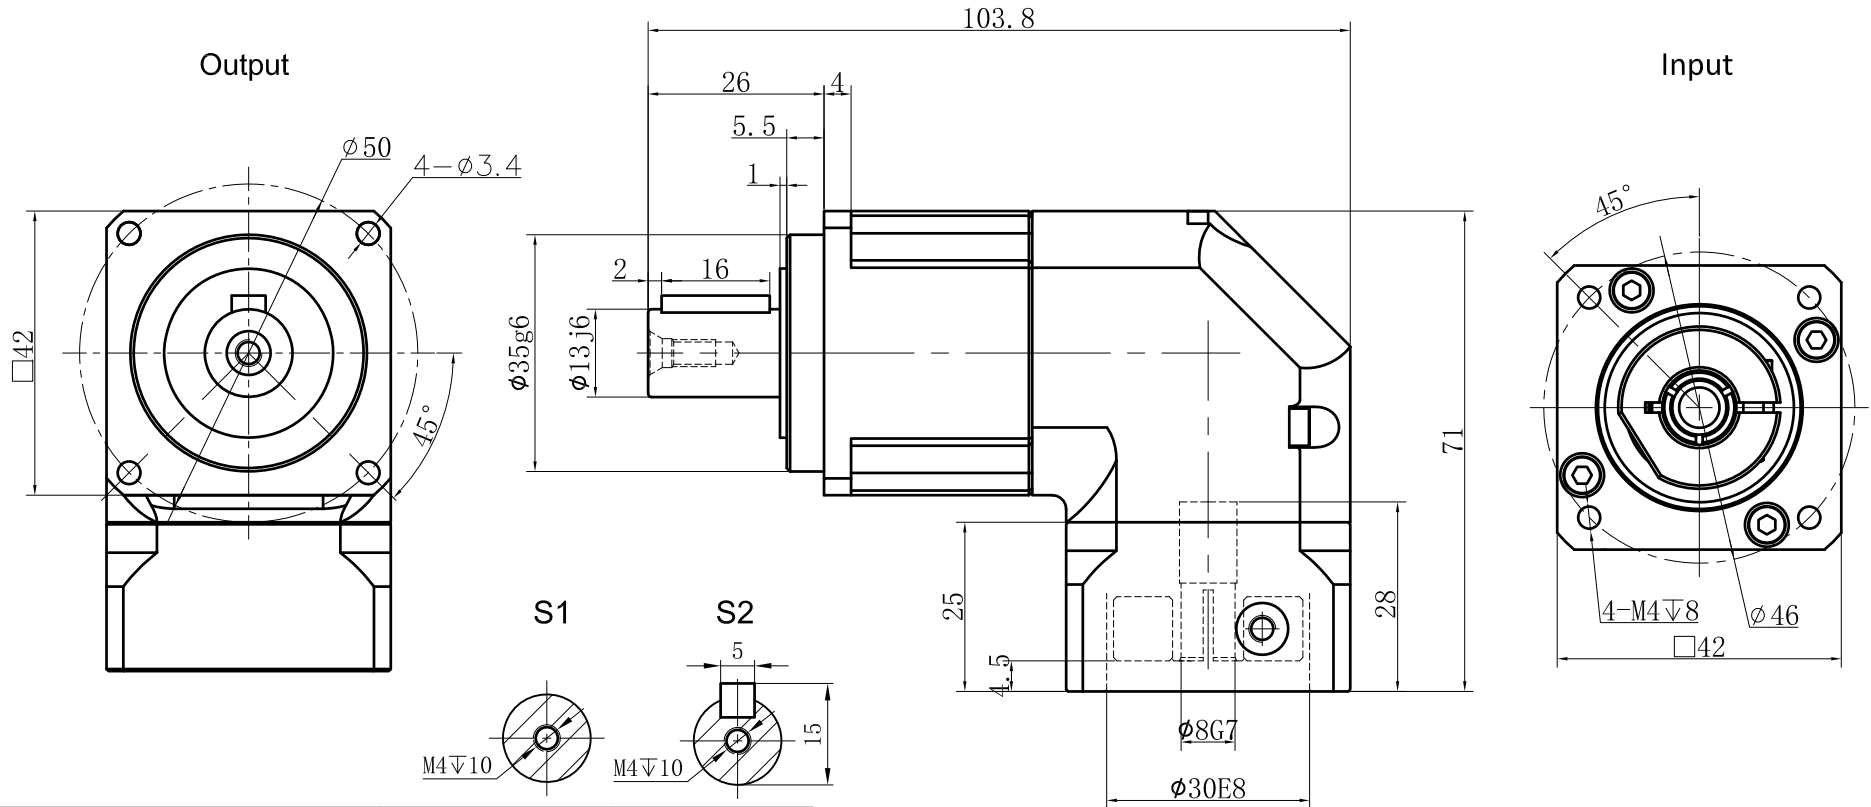

Transmission ratio	( A ):1	Mass moments of inertia	( B )Kg.cm <sup>2</sup>										
Rated output torque	( C )Nm	Max.Output torque	( D )Nm										
Rated input speed	5000rpm	Max input speed	10000rpm	10	0.09	14	25.2	Sign/Date					
Max.radial force	780N	Max.axial force	390N	7	0.09	19	34.2						
Efficiency	≥ 95%	Operating temperature	-20°~+90°	5	0.09	18	32.4						
Mounting position	Any	Lubrication method	Synthetic grease	4	0.09	15	27						
Weight ±3%	0.7Kg	Service life	20000h	Ratio	A	B	C	D	Ratio	A	B	C	D
Standard backlash	≤ 6 arcmin	Protection class	IP65	NOTE				Precision Planetary Reducer				TBR042	
Motor power		Noise level	61dB					Mark				TBR042-L1	
Motor dimensions								No.					
								Sign					
								Date					
								DRAW					
								CHEC					
								APPR					
								RULE					
												Shaft Type	
												Precision	

Above specifications are for standard reducer and may be subject to change without notice.