Customer Name:

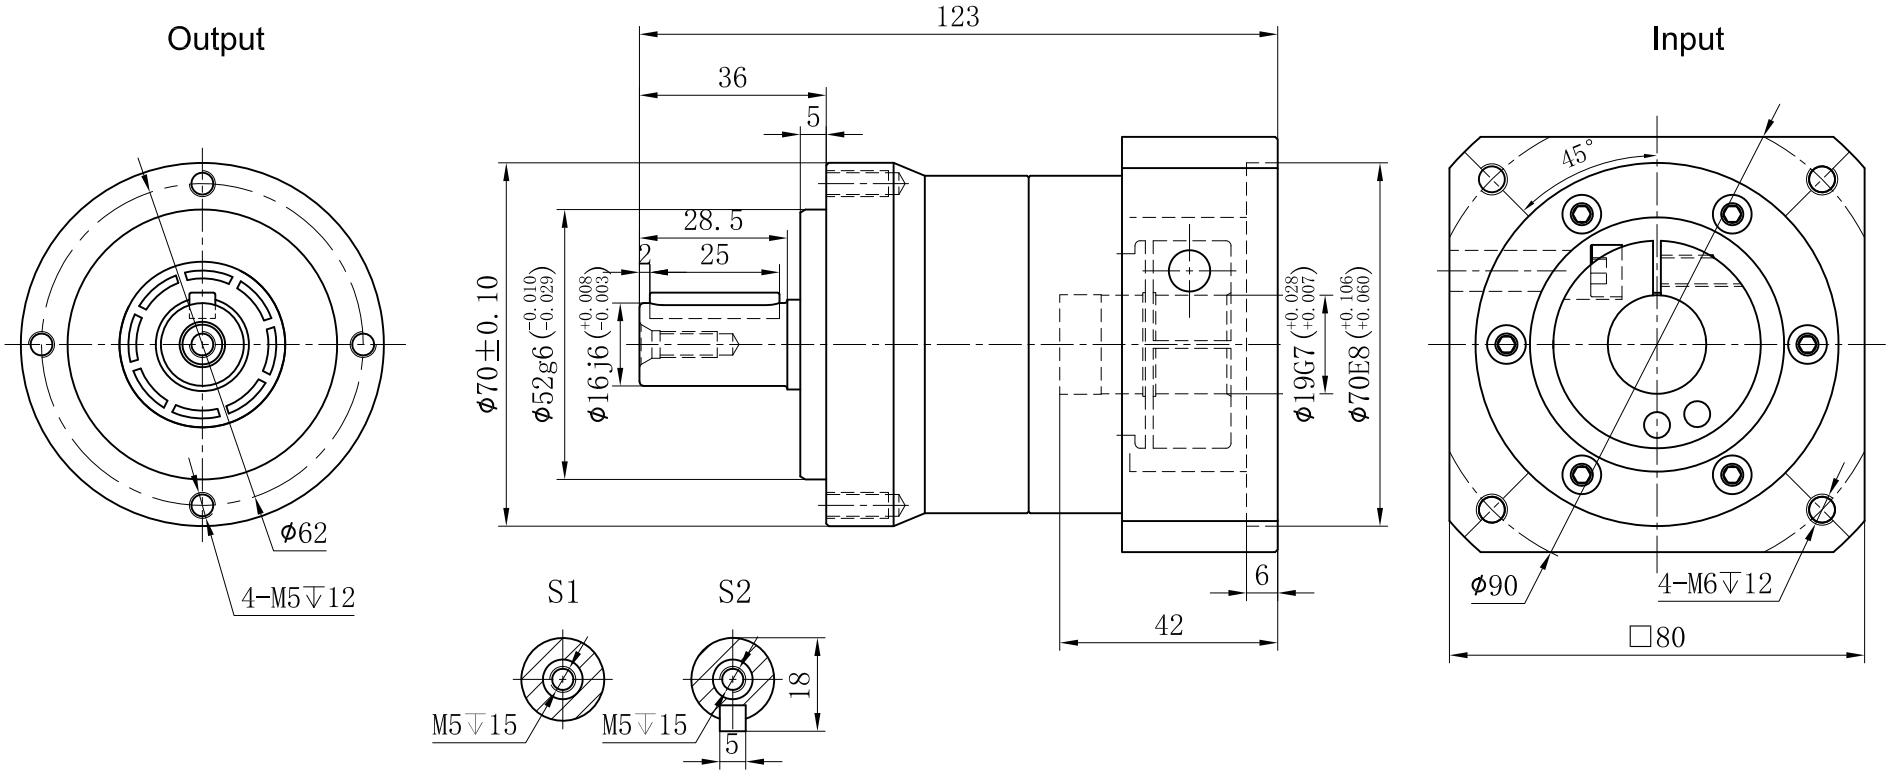

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	3000rpm	Max Input Speed	5000rpm
Max Radial Force	1530N	Max.axial Force	765N
Efficiency	≥ 97%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	1.3Kg	Service Life	20000h
Standard Backlash	≤ 5 arcmin	Protection Class	IP65
Motor Power	--KW	Noise Level	58dB
Motor Dimensions			

					Sign/Date					
	3	0.16	40	72			7	0.13	45	81
	4	0.14	45	81			8	0.13	45	81
	5	0.13	55	99			10	0.13	35	63
	6	0.13	50	90						
Ratio	A	B	C	D		Ratio	A	B	C	D

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

TCE070

TCE070-L1

GEARKO®

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.