Customer Name:

Output

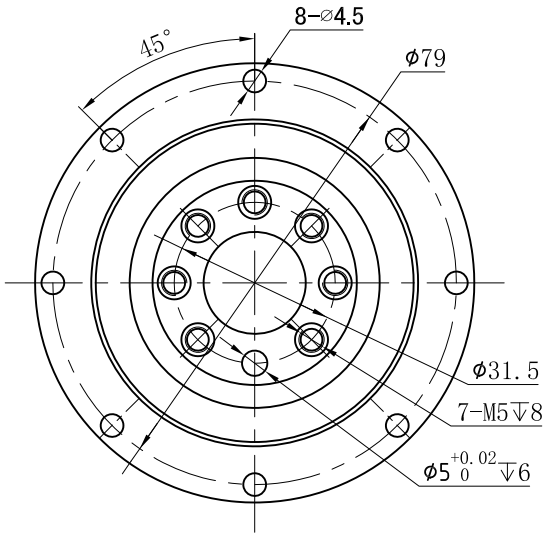

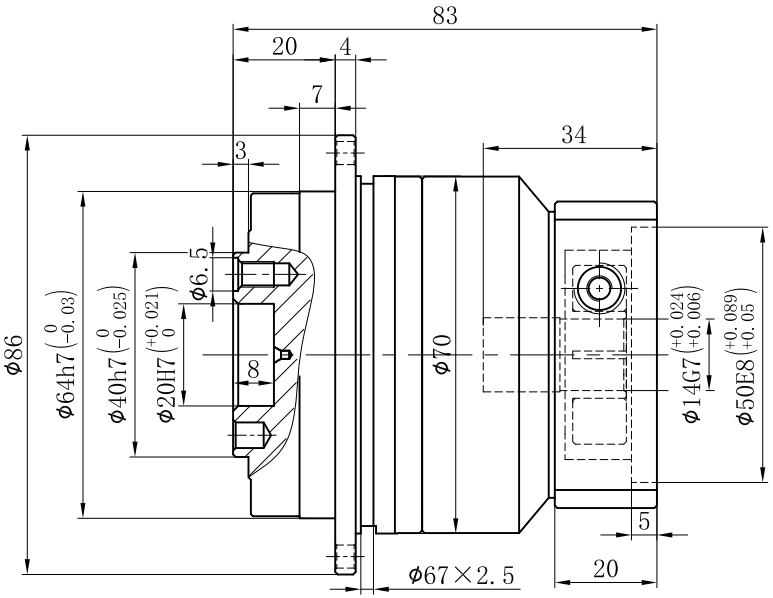

Input

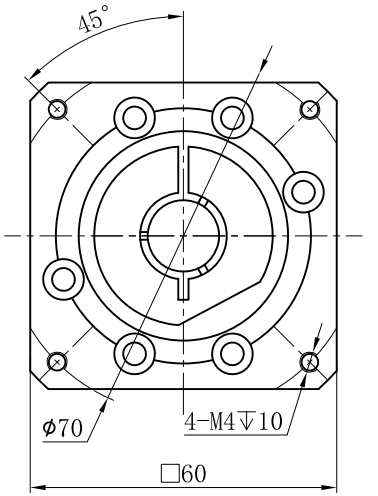

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	5000rpm	Max Input Speed	10000rpm
Max Benging Moment	125N	Max Axial Force	1050N
Efficiency	≥ 97%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	1.3Kg	Service Life	30000h
Standard Backlash	≤ 5 arcmin	Protection Class	IP65
Motor Power	--KW	Noise Level	58dB
Motor Dimensions			

	10	0.13	42	75.6	Sign/Date						
	7	0.13	50	90							
	5	0.13	58	104.4							
	4	0.14	50	90							
Ratio	A	B	C	D		Ratio	A	B	C	D	

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

TD064

TD064-L1

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.