



Customer name:

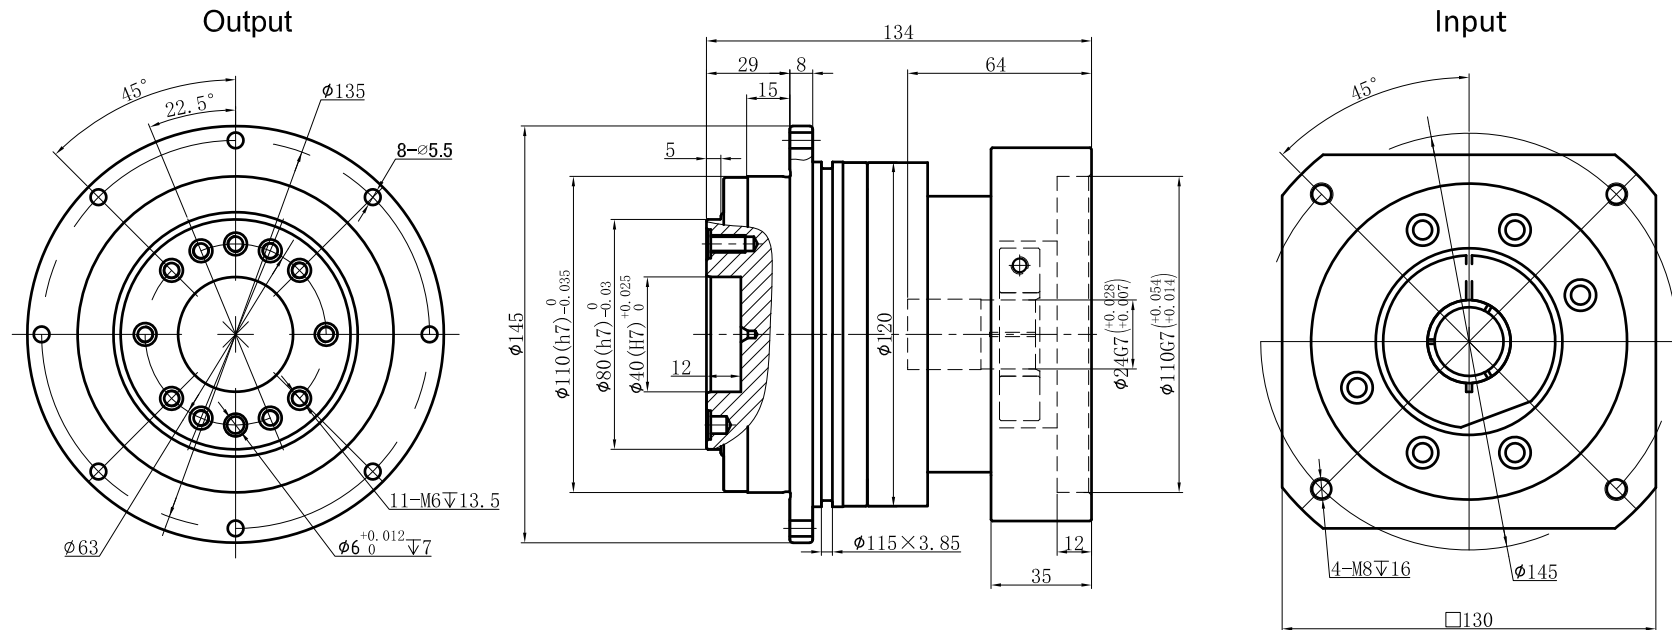

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²												
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm												
Rated input speed	4000rpm	Max input speed	8000rpm		10	2.57	235	423	Sign/Date						
					7	2.62	300	540							
					5	2.71	333	599.4							
					4	2.87	290	522							
Max.bending moment	430N	Max.axial force	2990N	Ratio	A	B	C	D		Ratio	A	B	C	D	
Efficiency	≥ 97%	Operating temperature	-20°~+90°												
Mounting position	Any	Lubrication method	Synthetic grease	NOTE					Precision Planetary Reducer			TD110			
Weight ±3%	5.9Kg	Service life	30000h												
Standard backlash	≤ 5 arcmin	Protection class	IP65		Mark	No.	Sign	Date				TD110-L1			
Motor power		Noise level	63dB												
Motor dimensions															

Above specifications are for standard reducer and may be subject to change without notice.