


Customer name:

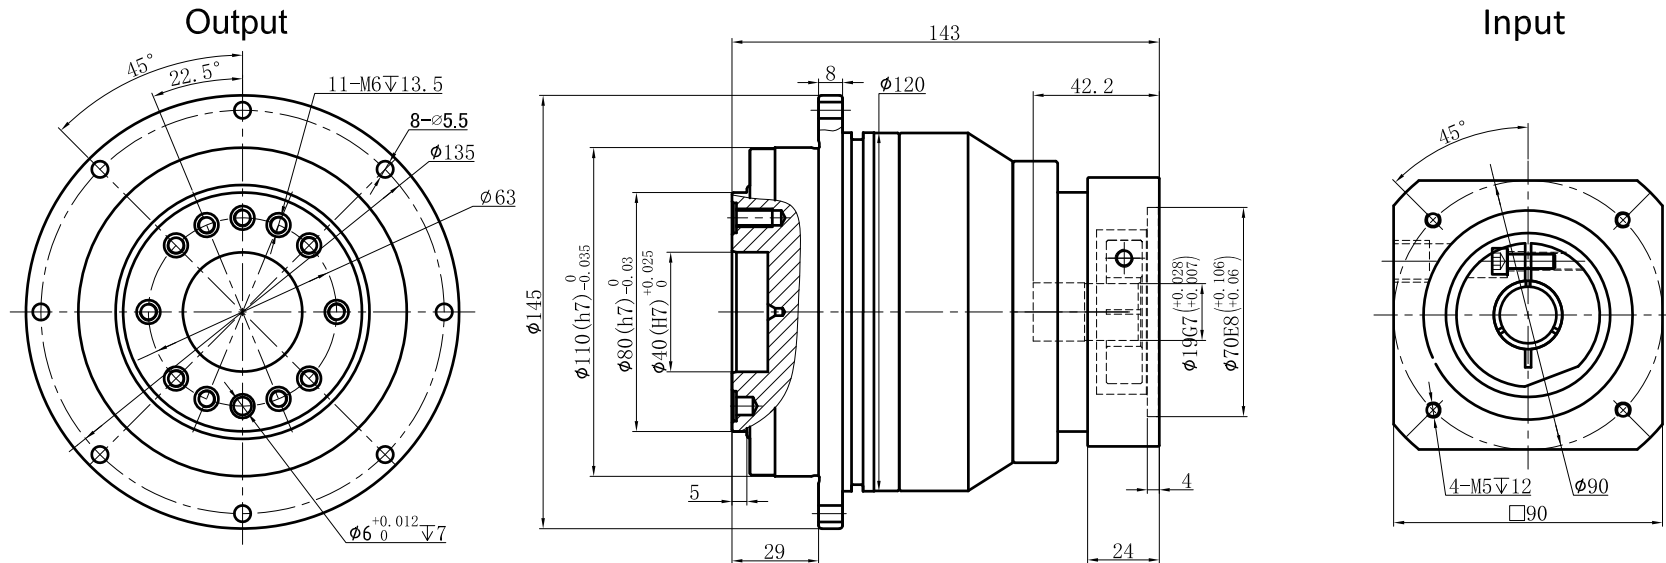

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²														
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm	40	0.47	260	468	Sign/Date									
Rated input speed	4000rpm	Max input speed	8000rpm	35	0.47	300	540			100	0.44	235	423				
Max.radial force	-	Max.axial force	2990N	25	0.47	333	599		70	0.44	300	540					
Efficiency	≥ 94%	Operating temperature	-20°~+90°	20	0.47	290	522		50	0.44	333	599					
Mounting position	Any	Lubrication method	Synthetic grease	Ratio	A	B	C	D	Ratio	A	B	C	D				
Weight ±3%	7.9Kg	Service life	20000h	NOTE				Precision Planetary Reducer				TD110					
Standard backlash	≤ 7 arcmin	Protection class	IP65					Mark				No.				TD110-L2	
Motor power		Noise level	60dB					Sign						Shaft Type		Precision	
Motor dimensions								Date						RULE			