



Customer Name:

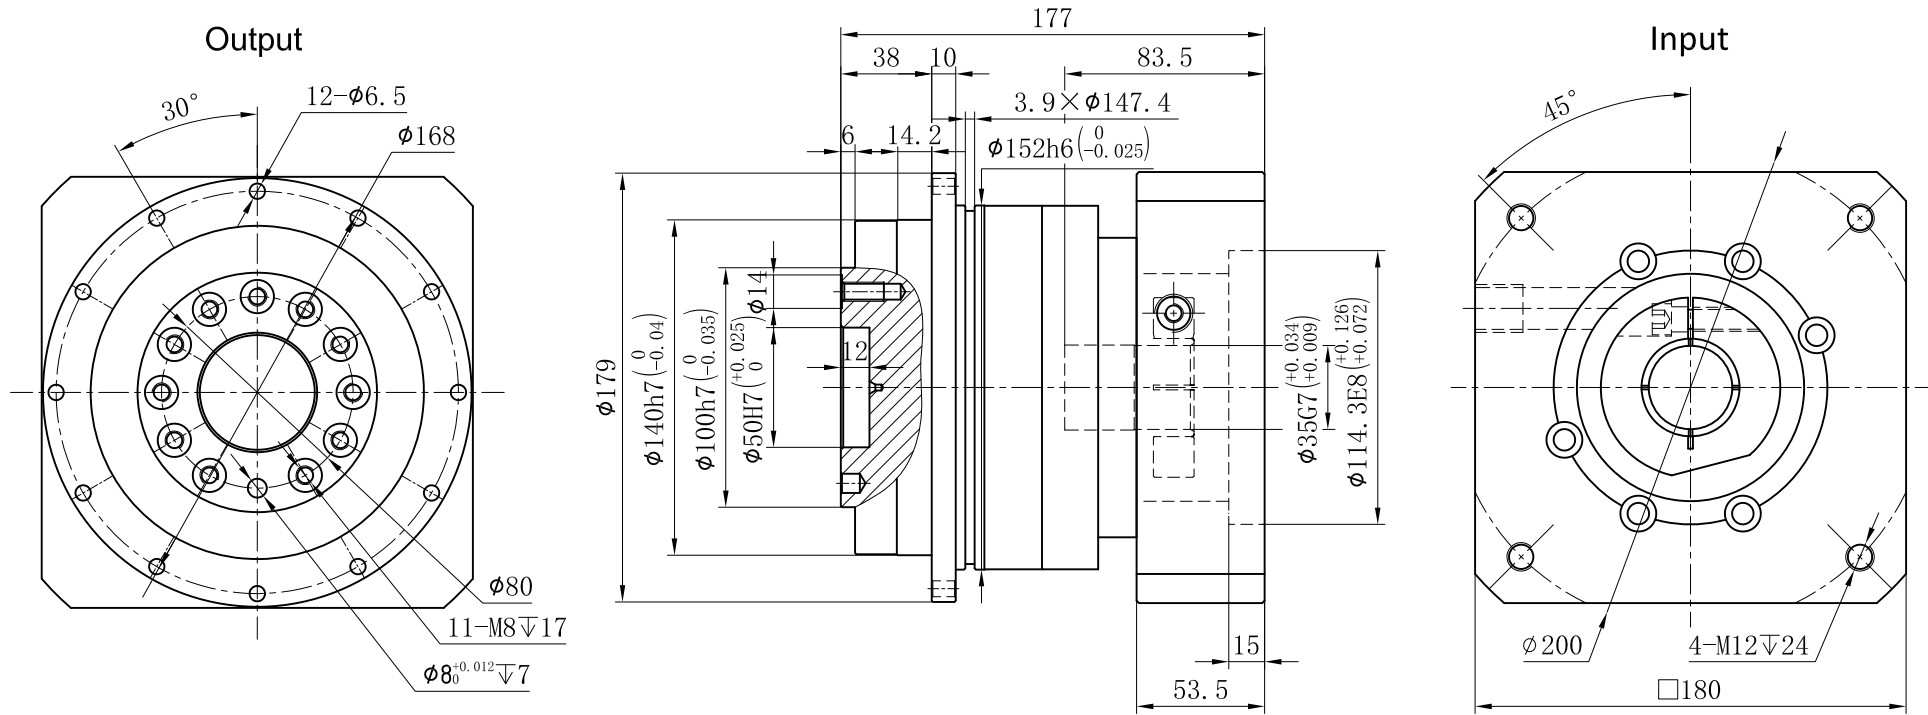

Transmission Ratio	( A ):1	Mass Moments Of Inertia	( B )Kg.cm <sup>2</sup>
Rated Output Torque	( C )Nm	Max Output Torque	( D )Nm
Rated Input Speed	3000rpm	Max Input Speed	6000rpm
Max Bending Moment	1300N	Max Axial Force	10590N
Efficiency	≥ 97%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	14.6Kg	Service Life	30000h
Standard Backlash	≤ 5 arcmin	Protection Class	IP65
Motor Power	-- KW	Noise Level	65dB
Motor Dimensions			

	4	7.54	545	981	Sign/Date				
	5	7.42	650	1170					
	7	7.14	555	999					
	10	7.03	460	828					
Ratio	A	B	C	D	Ratio	A	B	C	D
Note					Precision Planetary Reducer	TD140			
	Mark	No.	Sign	Date	TD140-L1		Shaft Type	Precision	
		DRAW							
		CHEC							
		APPR							
		RULE							

Above specifications are for standard reducer and may be subject to change without notice.