


Customer name:

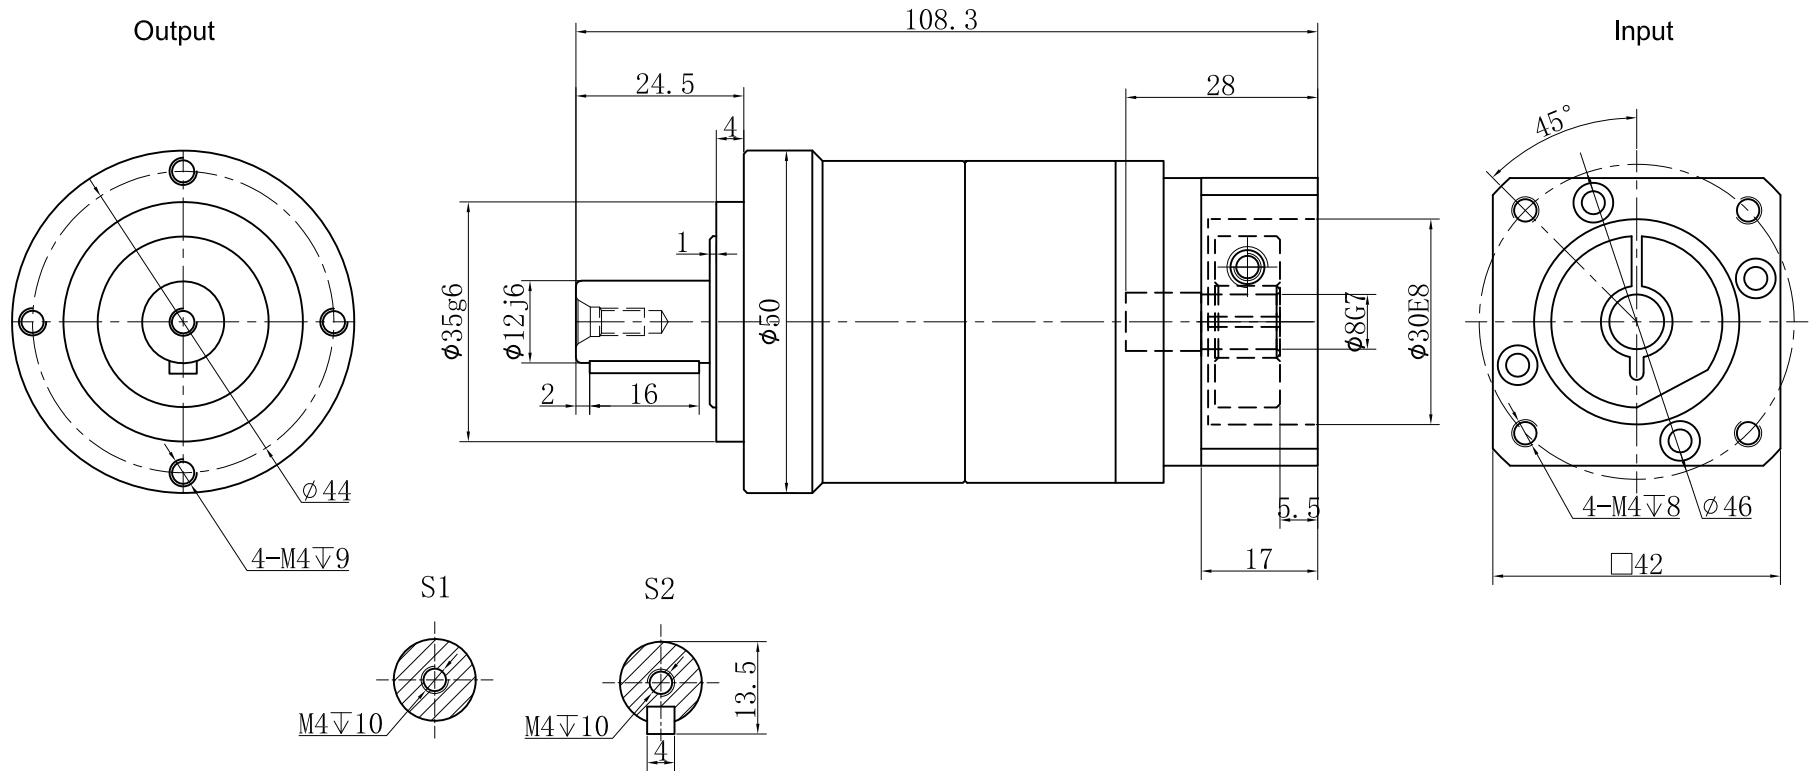

| | | | |
|---------------------|------------------|-------------------------|----------------------------------|
| Transmission ratio | (<u> A </u>):1 | Mass moments of inertia | (<u> B </u>)Kg.cm ² |
| Rated output torque | (<u> C </u>)Nm | Max.Output torque | (<u> D </u>)Nm |
| Rated input speed | 5000rpm | Max input speed | 10000rpm |
| Max.radial force | 702N | Max.axial force | 390N |
| Efficiency | ≥ 97% | Operating temperature | -20°~+90° |
| Mounting position | Any | Lubrication method | Synthetic grease |
| Weight ±3% | 0.9Kg | Service life | 20000h |
| Standard backlash | ≤ 7 arcmin | Protection class | IP65 |
| Motor power | | Noise level | 56dB |
| Motor dimensions | | | |

| | | | | | | | | | | |
|-------|---|-----|------|----|------|-----------|---|---|---|---|
| | | 100 | 0.03 | 14 | 25.2 | | | | | |
| | | 80 | 0.03 | 17 | 30.6 | | | | | |
| | | 70 | 0.03 | 19 | 34 | Sign/Date | | | | |
| | | 60 | 0.03 | 20 | 36 | | | | | |
| | | 50 | 0.03 | 22 | 39.5 | | | | | |
| | | 40 | 0.03 | 17 | 30.6 | | | | | |
| | | | | | | | | | | |
| Ratio | A | B | C | D | | Ratio | A | B | C | D |

| | | | | | | | |
|------|--|--|--|-----------------------------|--|------------|--|
| NOTE | | | | Precision Planetary Reducer | | TE050 | |
| | | | | | | TE050-L2 | |
| | | | | | | Shaft Type | |
| | | | | | | Precision | |
| | | | | | | | |

| | | | | |
|------|------|------|------|--|
| Mark | No. | Sign | Date | |
| | DRAW | | | |
| | CHEC | | | |
| | APPR | | | |
| | RULE | | | |

(Above specifications are for standard reducer and may be subject to change without notice.)