


Customer name:

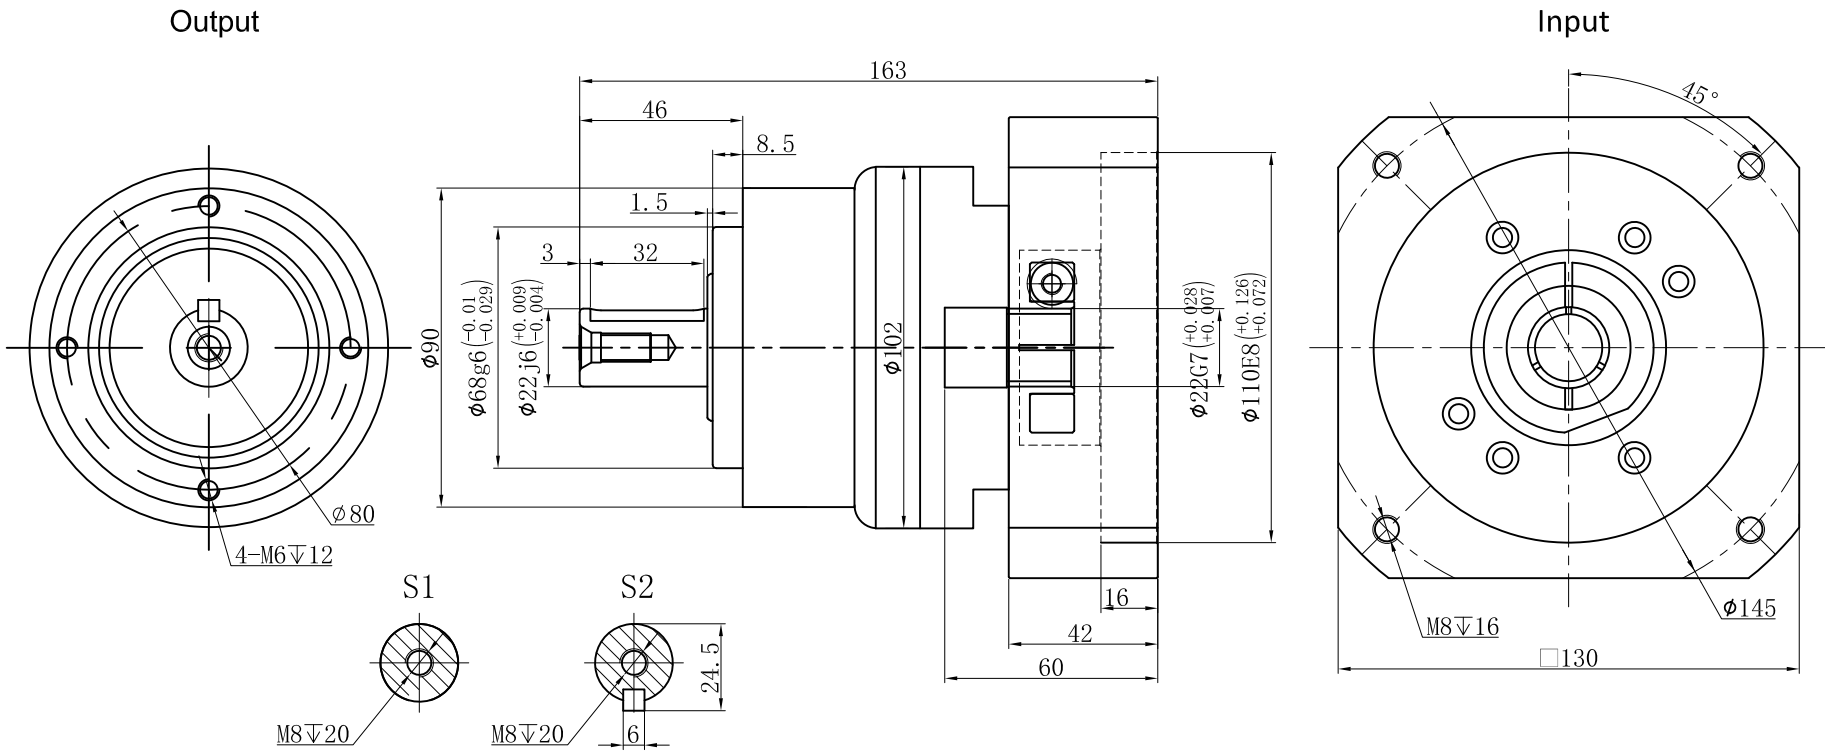

Transmission ratio	( <u>A</u> ):1	Mass moments of inertia	( <u>B</u> )Kg.cm <sup>2</sup>										
Rated output torque	( <u>C</u> )Nm	Max.output torque	( <u>D</u> )Nm										
Rated input speed	4000rpm	Max input speed	8000rpm	10	0.44	102	183	Sign/Date					
Max.radial force	2985N	Max.axial force	1625N	7	0.45	140	252			8	0.44	123	221
Efficiency	$\geq 97\%$	Operating temperature	$-20^\circ \sim +90^\circ$	5	0.47	160	280			6	0.45	148	266
Mounting position	Any	Lubrication method	Synthetic grease	4	0.48	140	252			3	0.61	130	234
Weight $\pm 3\%$	3.4Kg	Service life	20000h	Ratio	A	B	C	D	Ratio	A	B	C	D
Standard backlash	$\leq 5$ arcmin	Protection class	IP65	Note									
Motor power		Noise level	60dB										
Motor dimensions													

Above specifications are for standard reducer and may be subject to change without notice.